







CAT 6A TOOLLESS PLUG

The 4Cabling Shielded Field Termination Plug is designed to terminate CAT6A or CAT7 with a larger diameter 23AWG - 26AWG. Perfect for quick and reliable installation.

Features

- Fully Shielded with Zinc Alloy housing to prevent crosstalk
- Supports 23AWG - 26 AWG solid or stranded shielded CAT6A cable with an outside diameter between 6.0 and 7.5mm
- Open hinged design to simplify termination of shielded cable

MATERIAL	
Extractor	PC, UL 94V-2
Housing	Zinc die-casting with Nickel plated
RJ45 plug	
Housing	PC, UL 94V-2
Contact material	Phosphor bronze with 100 micro-inch nickel plated
Contact finish	Min. 50 micro-inch gold plated on surface contact area
Cover	Zinc die-casting with Nickel plated
Wire management bar	PC, UL 94-V2
IDC	
Housing	PC, UL 94-V2
Terminal	Titanium copper with tin plated
Grounding contact	Zinc die-casting with Nickel plated
Boot	
Housing	Zinc die-casting with Nickel plated
SR	PC, UL 94V-2
CAP	PC, UL 94V-2
PCB	UL 94-V0
Copper foil tape	
Dust cap	PE
PERFORMANCE	
Wiring	T568A & T568B
Insertion Force	Max. 30N (IEC 60603-7-5)
Retention Strength	7.7kg between jack and plug
Operating Temperature	-10-C to 60C (ISO/IEC 11801. ANSI/TIA 569 C.2)
Life (mating cycles)	
750 cycles min. (ISO/IEC 11801, ANSI/ TIA 568 C.2)	
IDC: Suitable for 23-26AWG stranded and solid wire, min. 20 installation cycles	
Suitable for cable jacket OD	6.0 - 7.5mm

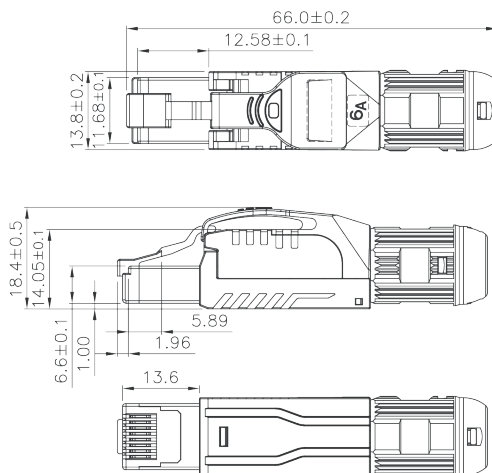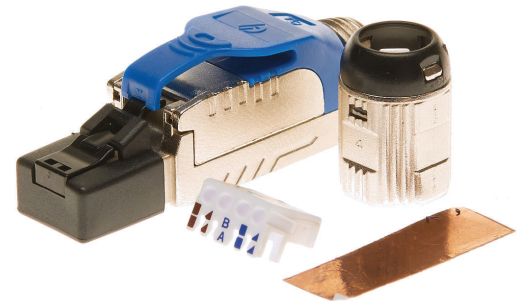

CONNECT & COLLECT LOCATIONS



4/201 Parramatta Road,
Homebush West NSW 2140

17/428 Old Geelong Road
Hoppers Crossing VIC 3029

2/1277 Lytton Road
Hemmant QLD 4174

1/9 Collingwood Street
Osborne Park WA 6017