





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C210796	2021/05/24	Vicky	 XI
F	C210910	2021/06/09	Vicky	 XI
G	C230011	2023/01/05	Vicky	 XI

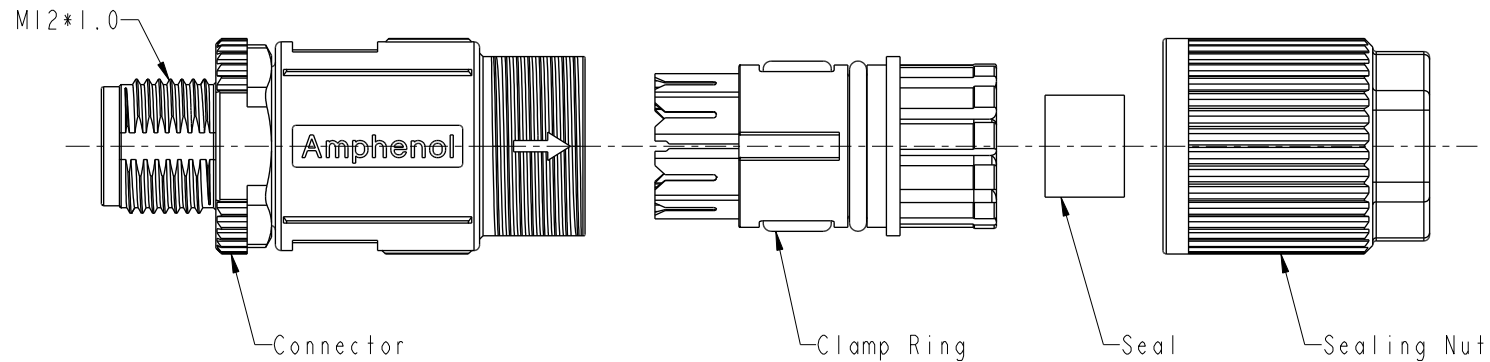

8P

Pin Assignment
Front View

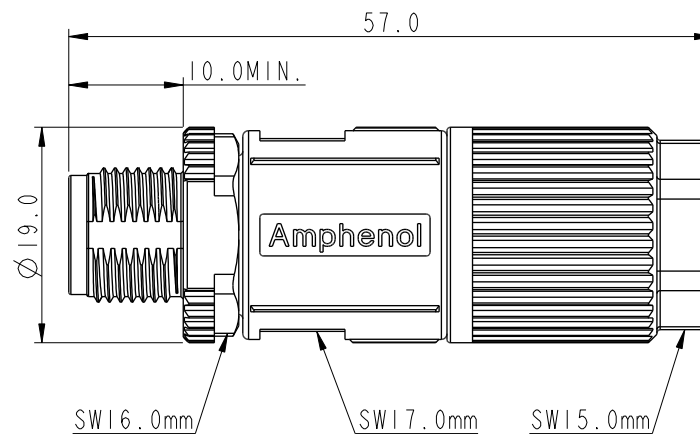

△ MSXS-XXBMMD-SL800I

—XX: No. of Pin

 Note:

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
- *  Nut: Metal
- *  O-Ring: Rubber, Gray
- Shield: Metal
- * O-Ring: Rubber, Gray
- *  Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Metal
- *  Seal1: Rubber, Black, OD $\varnothing$ 5.0mm~6.0mm
- * Seal2: Rubber, Gray, OD $\varnothing$ 6.0mm~7.2mm
- * Seal3: Rubber, Gray, OD $\varnothing$ 7.2mm~9.0mm
- * One set unassembled in a blister package

UNIT : mm			TITLE N SEN, M12 X -SHLD, SCREW CABLE W/O SR, M, M, FI IDC				ITEM NO		DRAWN BY Sam Ho		DATE 2019-06-03	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°			SCALE 2:1	SIZE A4	SHEET 1 OF 1	QC: Inspection item	DWG. NO  MSXS-XXBMMD-SL8001	CHECKED BY Fred Lee		DATE 2019-06-03		
			REV. G	WC-REV.			CUSTOMER ALTW	APPROVED BY Fred Lee		DATE 2019-06-03		